


# KABAAT®

## GRANI KOAT



**Grani Koat** is for the artists, for builders of our future & for designers who won't be constrained. Grani Koat is a light weight, durable building finish made up of flexible acrylic quartz sand and crushed stones.

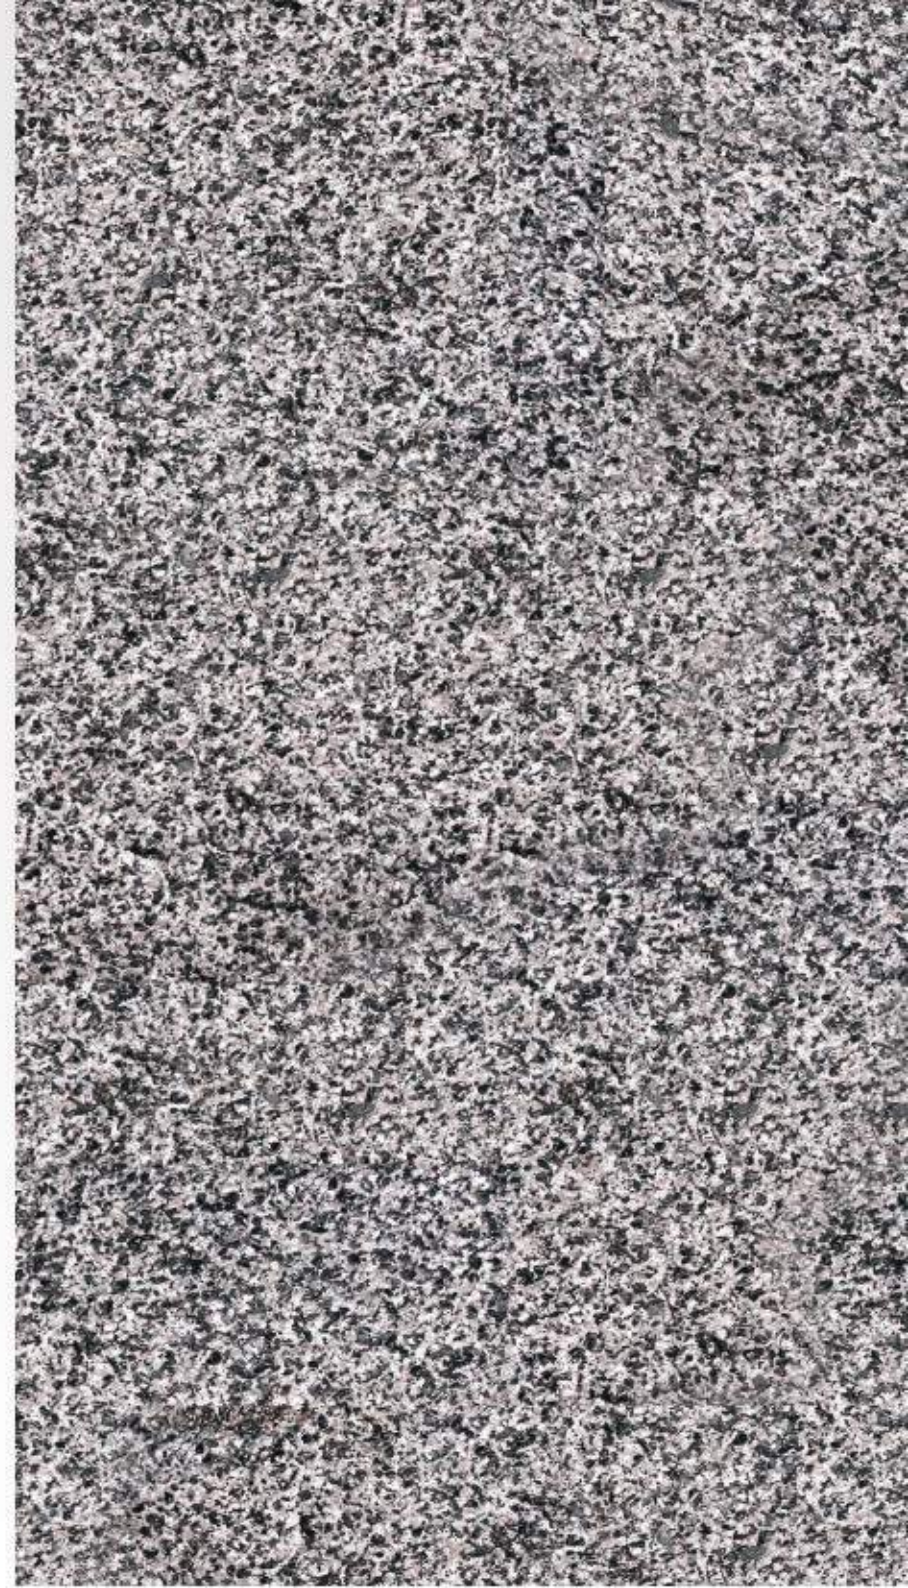

**Grani Koat** offers creative freedom to apply stone finish to virtually any building finish.

It is a high performance coating which withstands structural moments, tropical climates, UV exposure, mould and dirt pickup

## Luxury Finish with unmatched Realism

Granikoat skillfully formulated to match a naturally occurring stone in both appearance and texture. It creates natural stone - like walls, it is available in various shades fulfilling your needs.

Grani Koat

Natural Stone



Concrete Wood Brick Drywall



## Endless possibilities on various substrates

Granikoat is a thin film coating that can be applied to various substrates such as concrete, brick, drywall, GRC & Wood etc., With endless possibilities such as facades, details, interiors and art.

## Variety of Groove Design

Granikoat is not only a stone like design, but also it is possible to create various designs based on your creative idea numerous designs can be executed on the desired surfaces.



## Effortless Application

Granikoat's single component formula allows multiple installers to work side by side to achieve a uniform finish with quick dry times. A single professional can apply over 1000 sq. ft of Granikoat per day

## High Durability

Granikoat resists water, abrasions, harsh weather condition, UV radiations and mild dew. It is an ideal choice for your exterior applications that call for durability and grand aesthetics.





KG - 301



KG - 303



KG - 14535




KG - 321



KGT - 608



KGT - 701

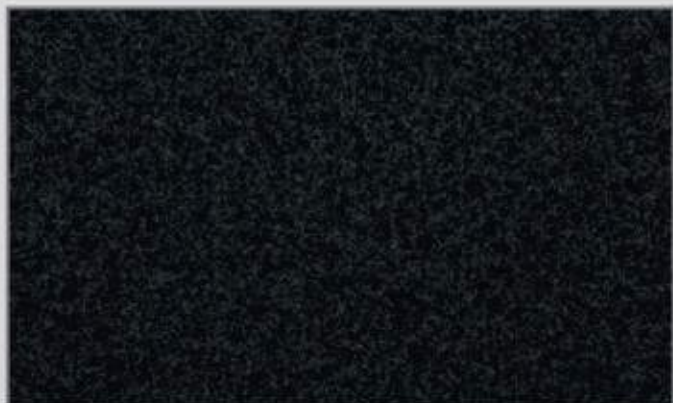

KGG - 535



KGT - 721



KG - 702

## APPLICATION IDEAS



## APPLICATION PROCEDURE



1. Primer



2. Fixing Masking Tape



3. First Grani Koat



4. Second Grani Koat



5. Remove Masking Tape



6. Kabaat Professional Top Coat

### NOTE :

- ⊕ Avoid exterior application late in the day when dew and condensation are likely to form or if rain is expected.
- ⊕ Do not apply during humid conditions.
- ⊕ Allow proper drying period between each coat.
- ⊕ Neighboring surfaces to be properly masked.
- ⊕ Masking tapes should be removed before the material gets completely dried.
- ⊕ Applied surface should be rolled to level the surface.
- ⊕ Top coat should be applied after the Grani Koat is completely dry.